



PAMIBIA UNIVERSITY
OF SCIENCE AND TECHNOLOGY

FACULTY OF COMPUTING AND INFORMATICS

DEPARTMENT OF COMPUTER SCIENCE

QUALIFICATION: BACHELOR OF COMPUTER SCIENCE	
QUALIFICATION CODE: 08BCSH	LEVEL: 8
COURSE: BROADBAND NETWORKS	COURSE CODE: BBN810S
DATE: JULY 2025	SESSION: 2
DURATION: 3 HOURS	MARKS: 100

SUPPLEMENTARY / SECOND OPPORTUNITY EXAMINATION QUESTION PAPER	
EXAMINER(S)	PROF GUY-ALAIN LUSILAO ZODI
MODERATOR:	MS EMILIA WEYULU

INSTRUCTIONS
<ol style="list-style-type: none">1. Answer ALL the questions.2. Write clearly and neatly.3. Number the answers clearly.

THIS QUESTION PAPER CONSISTS OF 8 PAGES (Including this front page)

Question 1 [10 marks]

The Telecom operator implements an IP / MPLS / Ethernet network whose topology is given in figure. 1. Networks A, B, C, D and E are IP's networks

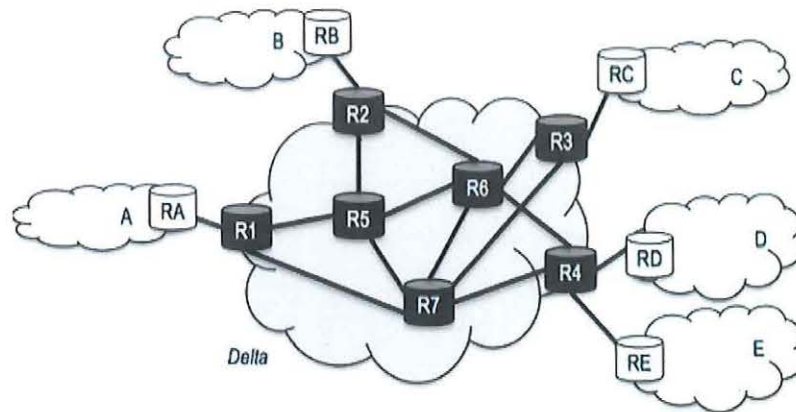


Figure 2. MPLS Network

The routing tables of the routers R1 to R7 are given in the Table 1.

It is assumed that the Telecom network administrator has enabled MPLS on his network. Equipment **R1** to **R7** are Label Switch Routers (LSP). (They switch packets using labels. LSPs are built on demand; that is, we wait until the path is necessary to build it. The Delta network does not implement quality of service.

An IP packet is sent from a computer in **Network A** to another computer in **Network D**. The packet is forwarded by router **RA** via the Delta Network Router **R1** with a TTL of 40. Router R1 is the Border Router receiving the packet. It will trigger the creation of the LSP that will route the packets to **network D**. It is assumed that this LSP is the first created in the network.

Table 1. Routing Table

R1 Routing Table		
Dest.	NH	Cost
R2	R5	1
R3	R7	2
R4	R7	2
R5	R5	1
R6	R5	2
R7	R7	1
NetworkA	RA	1
Network B	R5	3
Network C	R7	4
Network D	R7	3
Network E	R7	3

R2 Routing Table		
Dest.	NH	Cost
R1	R5	2
R3	R6	2
R4	R6	2
R5	R5	1
R6	R6	1
R7	R5	2
NetworkA	R5	3
Network B	RB	1
Network C	R6	4
NetworkD	R6	3
Network E	R6	3

R3 Routing Table		
Dest.	NH	Cost
R1	R7	2
R2	R6	2
R4	R6	2
R5	R6	2
R6	R6	1
R7	R7	1
Network	R1	3
Network B	R4	3
Network C	R4	1
Network D	R1	3
Network E	R4	3

R4 Routing Table		
Dest.	NH	Cost
R1	R7	20
R2	R6	10
R3	R6	10
R4	R7	-
R5	R6	10
R6	R7	10
Network A	R7	20
Network B	R6	20
Network C	R6	20
Network D	RD	20
Network E	RE	10

R5 Routing Table		
Dest.	NH	Cost
R1	R1	30
R2	R2	20
R3	R6	20
R4	R6	10
R6	R6	-
R7	R7	20
Network A	R1	20
Network B	R2	10
Network C	R6	30
Network D	R6	40
Network E	R6	10

R6 Routing Table		
Dest.	NH	Cost
R1	R5	30
R2	R2	20
R3	R3	20
R4	R4	10
R5	R5	20
R6	R7	-
Network A	R1	10
Network B	R2	30
Network C	R3	30
Network D	R4	40
Network E	R4	10

R7 Routing Table		
Dest.	NH	Cost
R1	R1	1
R2	R5	2
R3	R3	1
R4	R4	1
R5	R5	1
R6	R6	1
Network A	R1	2
Network B	R5	3
Network C	R3	2
Network D	R4	2
Network E	R4	2

a)	Which router will choose the label to use on the LSP link at the exit of R1 (LSP R1 to R7) towards Network D?	2 marks						
b)	<p>The switching table in R1 contains the following line:</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Entry Label</th> <th>Next host</th> <th>Release Label</th> </tr> </thead> <tbody> <tr> <td>D</td> <td>R7</td> <td>5</td> </tr> </tbody> </table> <p>In case the IP packet is to leave the Delta network, which router pops the MPLS header?</p>	Entry Label	Next host	Release Label	D	R7	5	2 marks
Entry Label	Next host	Release Label						
D	R7	5						
c)	Which LSR sent the packets to router R4 for the communication from R1 to D?	2 marks						
d)	Which next hop is associated with these packets in the switching table of R4?	2 marks						
e)	If packets leaving router R7 are labelled 9, draw the switching table of router R7.	2 marks						

Question 2 [10 marks]		
In TCP the Retransmit Time-Out (RTO) is determined on the basis of RTT observations for arriving ACKs.		
a)	Measured RTT values are subject to considerable fluctuations. List three reasons that explain this phenomenon.	3 marks
b)	What is an optimal value of RTO for a TCP connection? Explain Why	3 marks
c)	What are the implications of a RTO that is too large or too small?	4 marks

Question 3 [10 marks]

Consider the Figure 2. Suppose that the video is encoded at a fixed bit rate, and thus each video block contains video frames that are to be played out over the same fixed amount of time of 1 second. The server transmits the first video block at $t_0=0$ sec, the second block at $t=1$ sec, the third block at $t=2$ sec and so on. Once the client begins playout, each block should be played out 1second after the previous block

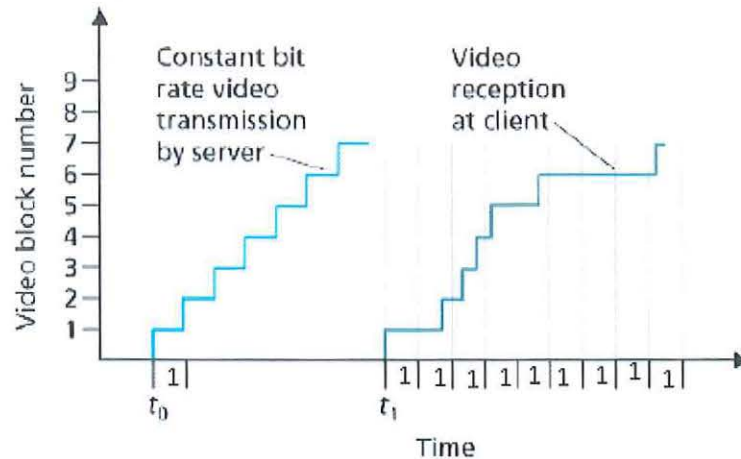


Figure 2. Video streaming transmission

a)	Suppose that the client begins playout as soon as the first block arrives at t_1 . In the figure below, how many blocks of video (including the first block) will have arrived at the client in time for their playout? Explain how you arrived at your answer.	3 marks
b)	Suppose that the client begins playout now at t_1+1 . How many blocks of video (including the first block) will have arrived at the client in time for their playout? Explain how you arrived at your answer.	3 marks
c)	In the same scenario at (b) above, what is the largest number of blocks that is ever stored in the client buffer, awaiting playout? Explain how you arrived at your answer.	2 marks
d)	What is the smallest playout delay at the client, such that every video block has arrived in time for its playout? Explain how you arrived at your answer.	2 marks

Question 4 [6 marks]		
<p>Compare Go-Back-N (GBN), Selective Repeat, and TCP (no delayed ACK). Assume that the timeout values for all three protocols are sufficiently long such that 5 consecutive data segments and their corresponding ACKs can be received (if not lost in the channel) by the receiving host (Host B) and the sending host (Host A) respectively. Suppose Host A sends 5 data segments to Host B, and the 2nd segment (sent from A) is lost. In the end, all 5 data segments have been correctly received by Host B.</p>		
a)	How many segments has Host A sent in total and how many ACKs has Host B sent in total? What are their sequence numbers? Answer this question for all three protocols	4 marks
b)	If the timeout values for all three protocol are much longer than 5 RTT, then which protocol successfully delivers all five data segments in shortest time interval?	2 marks

Question 5 [10 marks]		
a)	Give an example of an application-level requirement that might take advantage of the drop priority field in an ATM cell? List two reasons explaining your answer.	3 marks
b)	The IP-datagram for a TCP ACK message is 40 bytes long: it contains 20 bytes of TCP header and 20 bytes of IP header. Assume that this ACK is traversing an ATM network that uses AAL5 to encapsulate IP packets. How many ATM packets will it take to carry the ACK? [2 marks]	3 marks
c)	Asynchronous Transfer Mode (ATM) is a virtual-circuit (VC) based technology in which data is transmitted in small and fixed length packets called cells. List and explain the three advantages ATMs benefit in using cells instead of variable packet length.	4 marks

Question 6 [10 marks]		
a)	Consider a TCP connection between Host A and Host B. Suppose that the TCP segments travelling from Host A to Host B have source port number x and destination port number y . What are the source and destination port numbers for the segments travelling from Host B to Host A?	2 marks
b)	In packet switching, differentiate between networks with virtual circuits (VCs) and networks with datagram.	2 marks
c)	What characteristic of the network would you care most about to get good performance for <i>Navigating a predominantly text-only website</i> on the Internet. Explain your answer.	2 marks
d)	Why does the TCP congestion control mechanism have a “slow-start” and a “congestion avoidance” phase?	2 marks
e)	Why will two ISPs at the same level of the hierarchy often peer with each other?	2 marks

Question 7 [6 marks]																																		
<p>Suppose that a router has three input flows and one output port. It receives packets continuously as per table below, with all flows beginning at the same time and queues being empty before the arrival of the first packet. Packet order in each separate flow is listed in the table (packets 1 and 2 are the first to arrive). Length represents the number of clock ticks it takes to transmit a packet.</p>																																		
<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Packet ID</th> <th>Flow</th> <th>Length</th> <th>Arrival time</th> </tr> </thead> <tbody> <tr> <td>P1</td> <td>1</td> <td>1000</td> <td>0</td> </tr> <tr> <td>P2</td> <td>1</td> <td>1000</td> <td>0</td> </tr> <tr> <td>P3</td> <td>2</td> <td>600</td> <td>800</td> </tr> <tr> <td>P4</td> <td>2</td> <td>400</td> <td>800</td> </tr> <tr> <td>P5</td> <td>2</td> <td>400</td> <td>800</td> </tr> <tr> <td>P6</td> <td>3</td> <td>200</td> <td>1200</td> </tr> <tr> <td>P7</td> <td>3</td> <td>200</td> <td>2100</td> </tr> </tbody> </table>			Packet ID	Flow	Length	Arrival time	P1	1	1000	0	P2	1	1000	0	P3	2	600	800	P4	2	400	800	P5	2	400	800	P6	3	200	1200	P7	3	200	2100
Packet ID	Flow	Length	Arrival time																															
P1	1	1000	0																															
P2	1	1000	0																															
P3	2	600	800																															
P4	2	400	800																															
P5	2	400	800																															
P6	3	200	1200																															
P7	3	200	2100																															
a)	Determine the order in which packets are transmitted by the router if Fair queuing is used.	4 marks																																
b)	Determine the order in which packets are transmitted by the router if weighted Fair queuing is used, with flow 1 has a weight of 2, and flow 2 and 3 each a weight of 1.	4 marks																																

Question 8 [4 marks]

In the topology in Figure 4, **A**, **B**, **C** and **D** are different hosts that all wish to send at the maximum possible rate to host **E**. The arrows are links, and the numbers denote link capacities. The network operator would like to assign to hosts the transmission rates that satisfy the max-min fairness. Note that an allocation is max-min fair if you cannot increase the rate of one flow without decreasing the rate of another flow with lower rate.

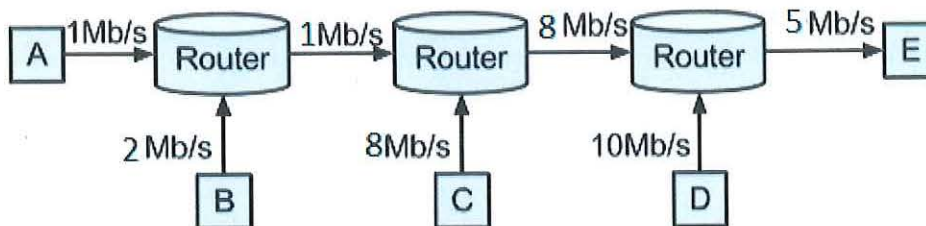


Figure 4. Network Topology

How should transmission rate be assigned to nodes **A**, **B**, **C** and **D** so as to satisfy the max-min fairness principle?

4 marks


Question 9 [4 marks]

Suppose you are designing a sliding window protocol for a 1 Mbps p-to-p link to the moon, which has a one-way latency of 1.25 seconds. Assuming that each frame carries 1 KB of data

a)	Find the window size of the protocol based on the bandwidth-delay product	2 marks
(c)	Calculate the round-trip time (RTT) for transmitting a frame from Earth to the moon and back, considering the given one-way latency of 1.25 seconds.	2 marks

Question 10 [14 marks]

The Transmission Control Protocol uses a method called congestion control to regulate the traffic entering the network. The behavior of TCP congestion control can be represented as a graph in which the x-axis indicates the time, and the y-axis indicates congestion window size. Please use the graph shown below to answer the following questions. Note that the graph does not explicitly show timeouts, but you should be able to figure out when timeouts happened based on the events shown.

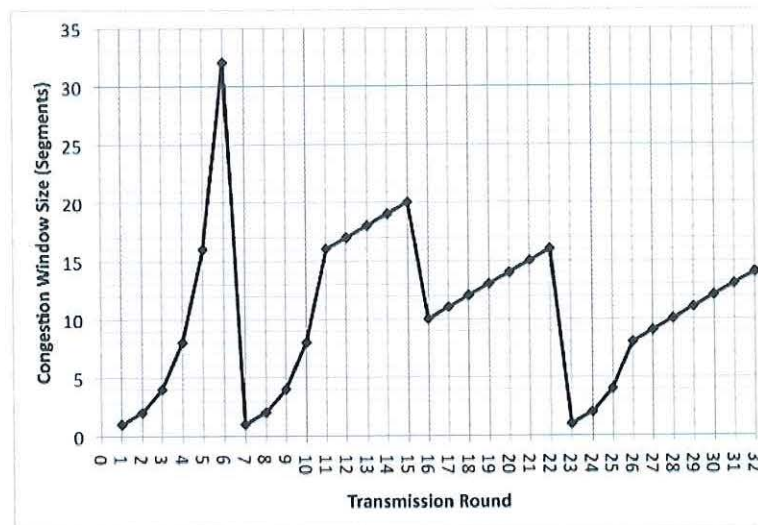


a)	Give two reasons why slow start is used, and explain why it does a better job than congestion avoidance	2 marks
b)	Identify the intervals of time when TCP slow start is operating. For each interval, identify which of the above	2 marks
c)	Identify the intervals of time when TCP congestion avoidance is operating. Why congestion avoidance should be used instead of slow Start during these intervals. Please clearly identify one specific reason	2 marks
d)	Identify the intervals of time when TCP fast retransmission is used. Please explain what fast retransmission does	2 marks
e)	Identify the intervals of time when TCP fast recovery is operating. What does fast recovery do and explain why is	2 marks
f)	Identify the interval(s) of time when fast recovery could have happened, but did not. Identify one specific	2 marks
g)	Which version of TCP is represented in this Figure?	2 marks

Question 11 [14 marks]

We consider a set of autonomous systems as shown in the figure 1. The relationships between these autonomous systems are of the peering or transit type (customer to supplier). The letters a through q represent IP routers on the networks of each of these systems. We suppose that:

- 1) BGP is enabled on all routers of all autonomous systems.
- 2) No specific engineering has been applied in BGP routing: no Local Preference attribute, no MED, etc.
- 3) All the routers and all the links of the autonomous systems are shown in the diagram.
- 4) OSPF protocol is used for internal routing in each of the autonomous systems. The cost of each link is equal to 1.
- 5) The identifiers of the routers are chosen in alphabetical order, that is, the identifier of router a is smaller than that of b, b is smaller than c,..., smaller than that of q.

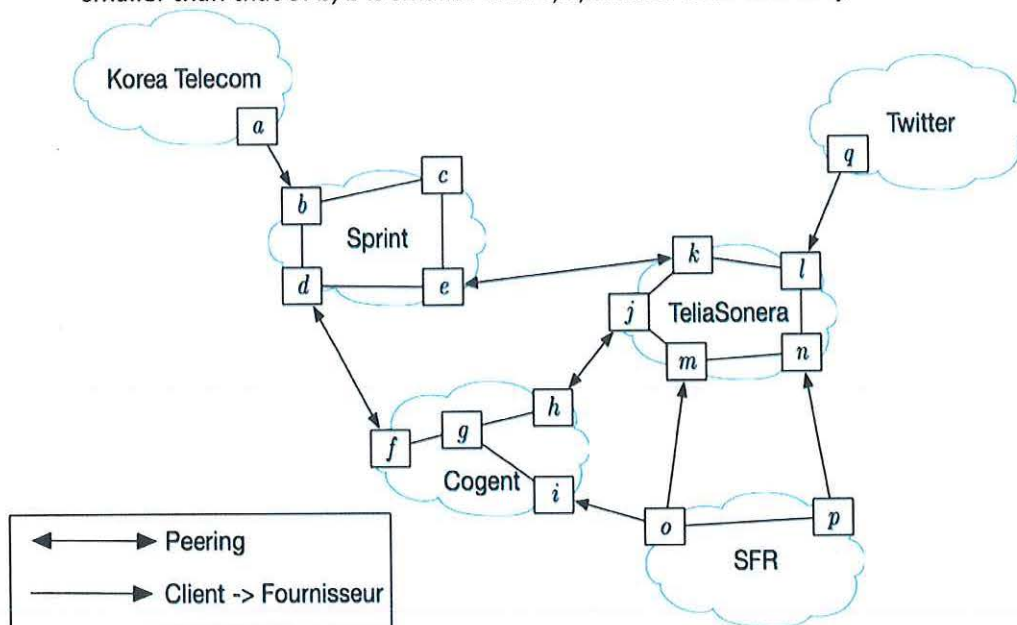

Suppose that SFR announces its prefix from its o and p routers and that it receives all the prefixes from the other autonomous systems via its two providers Cogent and TeliaSonera. SFR notes that the traffic from o to q successively crosses the routers o, m, n, l, and q.

a)	On router o, which BGP decision rule makes it possible to rule out the choice of router i as the next hop for traffic to router q?	2 marks
b)	Of the two remaining router p and router m, which BGP decision rule allows router m to be selected as the next hop for traffic to router q?	2 marks
c)	If router m receives a single BGP advertisement of Twitter's prefix containing also IP address of router q. Which router sent this advertisement to m? why?	2 marks

d)	On the TeliaSonera network, why is the path passing through route n preferred to the one passing through router j and router k?	2 marks
e)	According to the peering agreement between Cogent and TeliaSonera: (a) The SFR prefix is only announced from h to j. (b) The SFR prefix is only announced from j to h. (c) The SFR prefix is announced from h to j and from j to h. (d) The SFR prefix is announced neither from h to j, nor from j to h.	2 Marks
f)	According to the peering agreement between Cogent and Sprint: a) The SFR prefix is only announced from f to d. b) The SFR prefix is only announced from d to f. c) The SFR prefix is announced from f to d and from d to f. d) The SFR prefix is neither announced from f to d, nor from d to f.	2 marks
g)	According to the peering agreement between Sprint and TeliaSonera: a) The SFR prefix is only announced from e to k. b) The SFR prefix is only announced from k to e. c) The SFR prefix is announced from e to k and from k to e. d) The SFR prefix is neither announced from e to k, nor from k to e.	2 marks

===== **GOOD LUCK** =====